



BROCHURE



PRODUCT DESCRIPTION

- The CallMantra Robocalling + IVR Device connects your business to the GSM network, offering a cost-effective and intelligent communication solution.
- With GSM SIM support and two FXS Ports, it integrates seamlessly with PBX systems, VoIP gateways, and telephone instruments for efficient call handling.
- USB connectivity ensures easy setup with desktops or laptops, unlocking advanced features via CallMantra's user-friendly software. Simplify and enhance your communication with CallMantra's innovative device.



BASIC INFORMATION

MODEL	ADVANCED / TURBO
COMPUTER CONNECTIVITY	via USB PORT
SOFTWARE	WINDOWS
FREQUENCY BANDS	3G/4G/ VOLTE
MICROCONTROLLER	STM

SALIENT FEATURES

- User-Friendly GUI
- Multi-Party Conference
- In-Built Recording (320,000 mins)
- Hotline Facility
- Speed Dial (100 Numbers)
- Phone Book
- Flawless Call Recording
- Click-to-Call
- Auto Dialer
- Welcome Message
- In-Built Voice Mail
- Voice Broadcasting
- IVR Call Routing
- Pop-Up Notifications
- Missed Call Details
- Blacklist Call Management

TYPES OF PRODUCTS



ADVANCED	TURBO	RGM
Bulk Voice Calling	Bulk Voice Calling	Bulk Voice Calling
Bulk SMS	Bulk SMS	Bulk SMS
IVR	IVR	Standalone IVR
Auto Dialer	Auto Dialer	X
Live Data reporting	Live Data reporting	Live Data reporting
X	Call Recorder	Call Recorder
X	X	Bulk WhatsApp sender
X	X	Mobile App



FREE Bulk WhatsApp sender software with
ADVANCED & TURBO Devices

FEATURES

1 Automated Bulk Calling

Effortlessly reach your customers with automated voice calls, delivering your message with precision and efficiency.

Handle **800-1000 calls within 8 hours**, ensuring timely communication at scale. Collect valuable customer responses during each call, enabling informed decision-making and enhanced engagement.

2 Bulk WhatsApp Messages

Effortlessly **send unlimited WhatsApp messages** to your customers, complete with rich media like **images, videos, and documents**, as well as interactive buttons for enhanced engagement.


Enjoy **live reporting** to monitor campaign performance and seamlessly manage multiple WhatsApp accounts through the software for efficient communication.

3 Bulk SMS

Send bulk SMS to your customers to keep them informed about **important business updates, promotions, or announcements**, ensuring timely, efficient, and personalized communication at scale.

4 IVR Based Call-Routing

Set a personalised welcome message and route incoming calls based on **keypress selections (0-9)** for streamlined business operations. For example, **Press 1 for Sales, Press 2 for Service**, ensuring efficient call management and a professional customer experience.

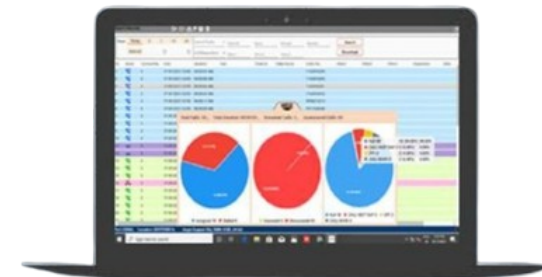

FEATURES




VOICE MAIL FACILITY

The system features an automatic voicemail function with pre-recorded greetings, allowing customers to leave messages and extending discussion time as needed.



EASY INSTALLATION

The device offers plug-and-play installation for quick and hassle-free setup.



USER-FRIENDLY GUI

A clear, intuitive interface ensures effortless navigation and efficient use of all features.



CONFERENCE CALL

Supports multiparty conference calls (up to 8 participants) on the GSM network with flawless voice quality for seamless communication.



AUTO DIALER

Boosts efficiency by 200-300%, reducing idle time and optimizing call engagement.



RUGGED DESIGN

Built for durability, the device undergoes rigorous testing to ensure superior performance and reliability.



HOT DIALING


Automatically dials a pre-set number when the handset is lifted or the hook is off, streamlining call connections.




WELCOME MESSAGE

Customizable welcome messages enhance the customer experience and reinforce professional communication.


CONNECTIVITY

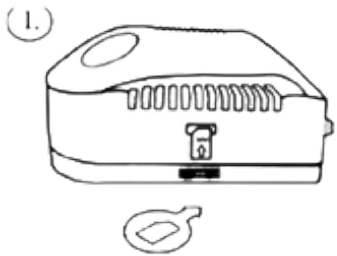


Insert Nano Sim as per indication shown on device

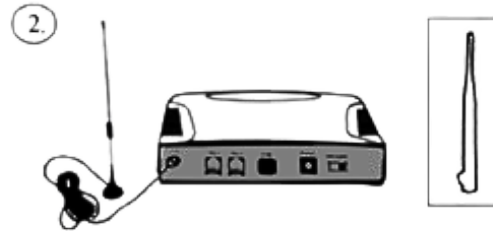


Connect to External wire antenna or stick antenna

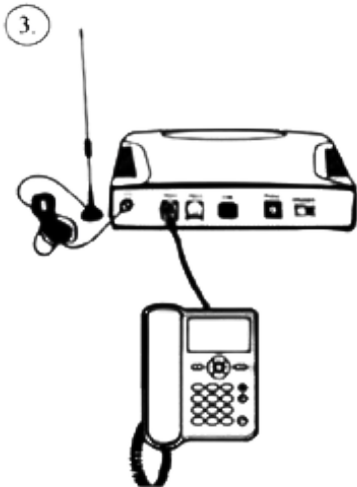


Connect Telephone Instruments with fxo/tel. Port

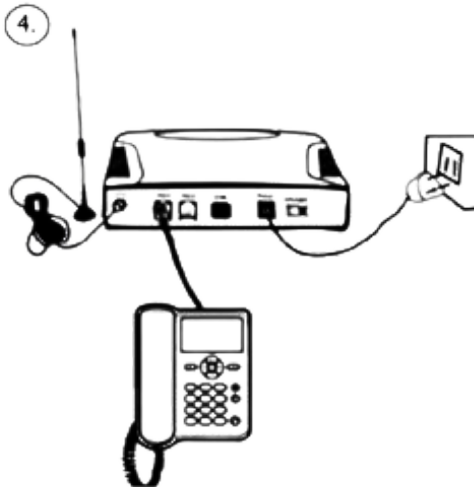

Connect to power adaptor and with on slide button

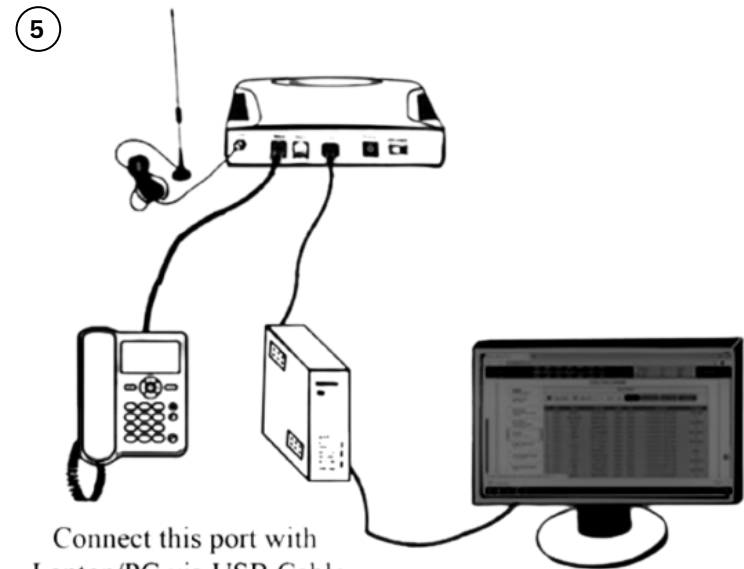

Connect this port with Laptop/PC via USB Cable

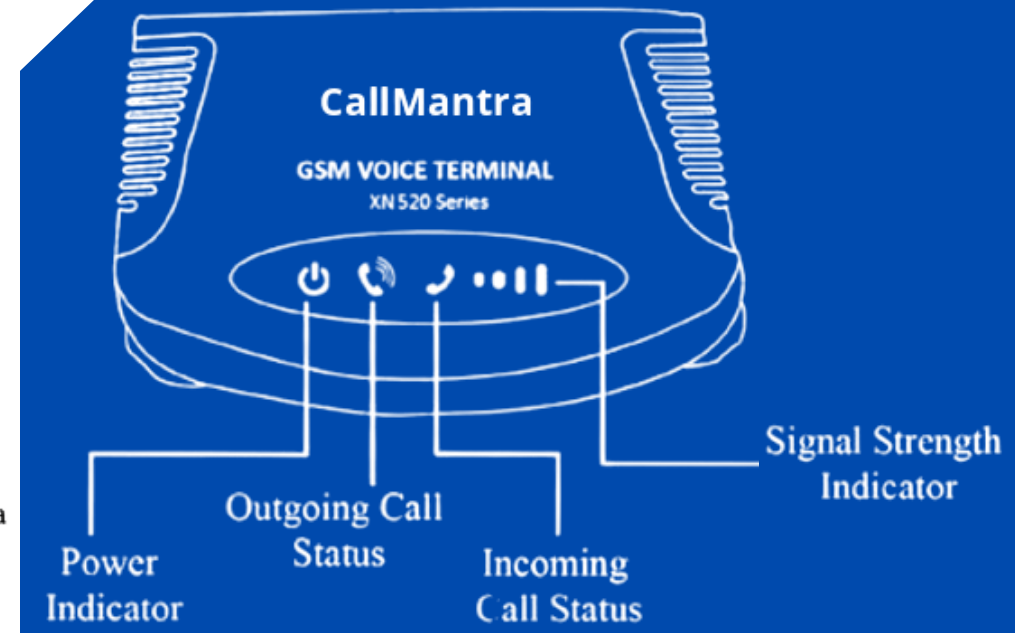

TECHNICAL SPECIFICATIONS

MODEL NO.

Model Name	ADVANCED / TURBO
------------	------------------

SIM PORT

GSM SIM Cards Frequency Bands	Quad-band-GSM850/1900MHz, 900/ 1800 MHz phase 2+ full band
SIM Interface	1.8, 3V SIM Interface
SIM Card Slot	Nano sim card
Antenna amplifying	3.5db (omni-direction)
Antenna Connection	SMA antenna connection

FXS PORT

Connector	2 Parallel RJ11 Connectors
Dialling and Reception	DTMF Dialling
CLIP	DTMF CLI
Answering and Disconnect Signalling	Polarity reversal for Call Connect/Disconnect Signalling
Dial tone frequency	450 MHz
Picking off voltage	30mA / 41mA

POWER SUPPLY

Input	External power adaptor 100-240 VAC, 47-63HZ Output: 12VDC@1.25A
Power Consumption	5W (Typical)

OPERATION CIRCUMSTANCES

Operation Temperature	-10C~60C
Storage Temperature	-20C~70C
Operation Humidity	45%-95%

OTHERS

Mounting option	Wall Mount and table Top
Device Dimensions (LXWXH)	163mmx113mmx32mm
Packing Box Dimensions (LXWXH)	257mmx193mmx64mm
Actual Weight	450 gm
Volumetric Weight	800 gm
Packaging	Standard carton



CONTACT US



www.callmantra.in



+91 7065293000



contact@callmantra.in

FOLLOW US



SATNARAYAN PLASTICS & MOULS PVT. LTD

PLOT NO 71, UDYOG KENDRA EXTN. 1, GREATER NOIDA,
Gautam Buddha Nagar, Uttar Pradesh, 201306